


Prestressed Concrete 16"x4'-0" NiCore Plank

2 Hour Fire Resistance Rating With 2" Topping

PHYSICAL PROPERTIES Composite Section	
$A_c = 418 \text{ in.}^2$	Precast $b_w = 14.25 \text{ in.}$
$I_c = 15498 \text{ in.}^4$	Precast $S_{bcp} = 1653 \text{ in.}^3$
$Y_{bcp} = 9.38 \text{ in.}$	Topping $S_{tct} = 2542 \text{ in.}^3$
$Y_{tcp} = 6.62 \text{ in.}$	Precast $S_{tcp} = 2340 \text{ in.}^3$
$Y_{tct} = 8.82 \text{ in.}$	Precast Wt. = 367 PLF
	Precast Wt. = 91.75 PSF

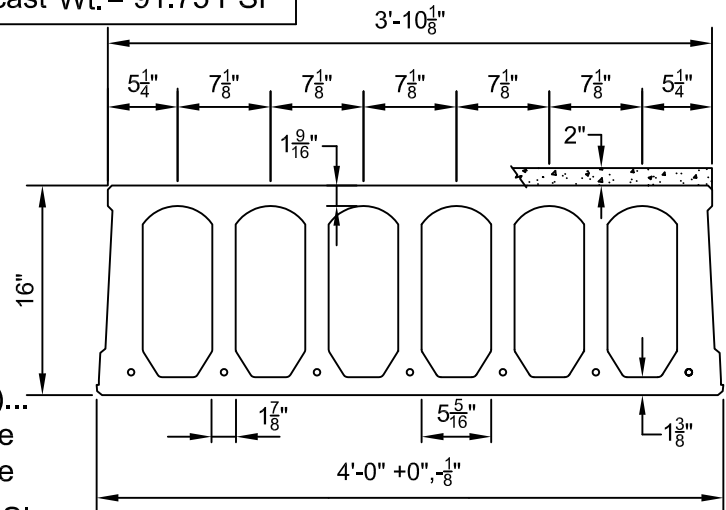

DESIGN DATA

- Precast Strength @ 28 days = 6000 PSI
- Precast Strength @ release = 3500 PSI
- Precast Density = 150 PCF
- Strand = 1/2"Ø and 0.6"Ø 270K Lo-Relaxation.
- Strand Height = 1.75 in.
- Ultimate moment capacity (when fully developed)...
7-1/2"Ø, 270K = 323.1 k-ft at 60% jacking force
7-0.6"Ø, 270K = 441.9 k-ft at 60% jacking force
- Maximum bottom tensile stress is $10\sqrt{f'_c} = 775 \text{ PSI}$
- All superimposed load is treated as live load in the strength analysis of flexure and shear.
- Flexural strength capacity is based on stress/strain strand relationships.
- Deflection limits were not considered when determining allowable loads in this table.
- Topping Strength @ 28 days = 3000 PSI. Topping Weight = 25 PSF.
- These tables are based upon the topping having a uniform 2" thickness over the entire span. A lesser thickness might occur if camber is not taken into account during design, thus reducing the load capacity.
- Span/strand combinations to the left of and below the solid line require 3/8"Ø top strands.
- Some load values are controlled by ultimate web shear strength per ACI Equation 11-1 and Section 11.4.6.1(b). Shear capacity can be increased by partially filling cores in order to achieve flexural capacity.
- Camber is inherent in all prestressed hollow core slabs and is a function of the amount of eccentric prestressing force needed to carry the superimposed design loads along with a number of other variables. Because prediction of camber is based on empirical formulas it is at best an estimate, with the actual camber usually higher than calculated values.
- At 2 hours the calculated strand temperature is 790 degrees Fahrenheit @ 49% of yield strength.

SAFE SUPERIMPOSED SERVICE LOADS		IBC 2012 & ACI 318-11 (1.2 D + 1.6 L)																		
Strand Pattern	LOAD (PSF)	SPAN (FEET)																		
		21	23	25	27	29	31	33	35	37	39	41	43	45	47	49	51	53	55	57
7 - 1/2"Ø	LOAD (PSF)	332	293	260	233	221	200	182	165	148	121	99	79	62	47	34	XXXXXXXXXX			
7 - 0.6"Ø	LOAD (PSF)	332	293	260	233	210	190	172	156	143	131	131	120	111	102	92	76	62	49	38



2655 Molly Pitcher Hwy. South, Box 2013
Chambersburg, PA 17202-9203
717-267-4505 Fax 717-267-4518

This table is for simple spans and uniform loads. Design data for any of these span-load conditions is available on request. Individual designs may be furnished to satisfy unusual conditions of heavy loads, concentrated loads, cantilevers, flange or stem openings and narrow widths. The allowable loads shown in this table reflect a 2 Hour & 0 Minute fire resistance rating.