


# Prestressed Concrete 16"x4'-0" NiCore Plank

2 Hour Fire Resistance Rating (Untopped)

PHYSICAL PROPERTIES Precast	
A = 352 in. <sup>2</sup>	b <sub>w</sub> = 14.25 in.
I = 10,985 in. <sup>4</sup>	S <sub>b</sub> = 1,379 in. <sup>3</sup>
Y <sub>b</sub> = 7.97 in.	S <sub>t</sub> = 1,367 in. <sup>3</sup>
Y <sub>t</sub> = 8.03 in.	Wt. = 367 PLF
e = 6.19 in.	Wt. = 91.75 PSF

## DESIGN DATA

- Precast Strength @ 28 days = 6000 PSI
- Precast Strength @ release = 3800 PSI
- Precast Density = 150 PCF
- Strand = 1/2"Ø and 0.6"Ø 270K Lo-Relaxation.
- Strand Height = 1.75 in.
- Ultimate moment capacity (when fully developed)...  
7-1/2"Ø, 270K = 295.8k-ft at 60% jacking force  
7-0.6"Ø, 270K = 406.8 k-ft at 60% jacking force
- Maximum bottom tensile stress is  $10\sqrt{f'_c} = 775$  PSI
- All superimposed load is treated as live load in the strength analysis of flexure and shear.
- Flexural strength capacity is based on stress/strain strand relationships.
- Deflection limits were not considered when determining allowable loads in this table.
- Span/strand combinations to the left of and below the solid line require 3/8"Ø top strands.
- Load values are controlled by ultimate flexural strength, structural fire endurance, or ultimate web shear.
- Some load values are controlled by ultimate web shear strength per ACI Equation 11-1 and Section 11.4.6.1(b). Shear capacity can be increased by partially filling cores in order to achieve flexural capacity.
- Camber is inherent in all prestressed hollow core slabs and is a function of the amount of eccentric prestressing force needed to carry the superimposed design loads along with a number of other variables. Because prediction of camber is based on empirical formulas it is at best an estimate, with the actual camber usually higher than calculated values.
- At 2 hours the calculated strand temperature is 790 degrees Fahrenheit @ 49% of yield strength.

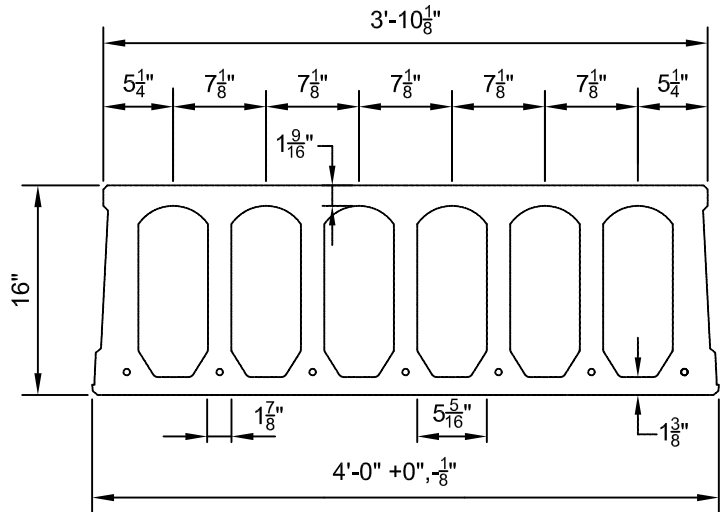

SAFE SUPERIMPOSED SERVICE LOADS		IBC 2012 & ACI 318-11 (1.2 D + 1.6 L)																		
Strand Pattern		SPAN (FEET)																		
		24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
7 - 1/2"Ø	LOAD (PSF)	251	225	203	196	179	163	150	133	111	92	76	62	49	38	28	19	<del>XXXXXXXXXX</del>		
7 - 0.6"Ø	LOAD (PSF)	254	227	205	186	169	154	141	130	119	121	112	104	96	90	76	64	53	43	34

**NITTEHOUSE**  
CONCRETE PRODUCTS

2655 Molly Pitcher Hwy. South, Box 2013  
Chambersburg, PA 17202-9203  
717-267-4505 Fax 717-267-4518

This table is for simple spans and uniform loads. Design data for any of these span-load conditions is available on request. Individual designs may be furnished to satisfy unusual conditions of heavy loads, concentrated loads, cantilevers, flange or stem openings and narrow widths. The allowable loads shown in this table reflect a 2 Hour & 0 Minute fire resistance rating.