


# Prestressed Concrete 8"x4'-0" NiCore Plank

1 Hour Fire Resistance Rating (Untopped)

PHYSICAL PROPERTIES Precast	
A = 235 in. <sup>2</sup>	b <sub>w</sub> = 13.13 in.
I = 1838 in. <sup>4</sup>	S <sub>b</sub> = 459 in. <sup>3</sup>
Y <sub>b</sub> = 4.00 in.	S <sub>t</sub> = 459 in. <sup>3</sup>
Y <sub>t</sub> = 4.00 in.	Wt. = 245 PLF
e = 2.25 in.	Wt. = 61.25 PSF

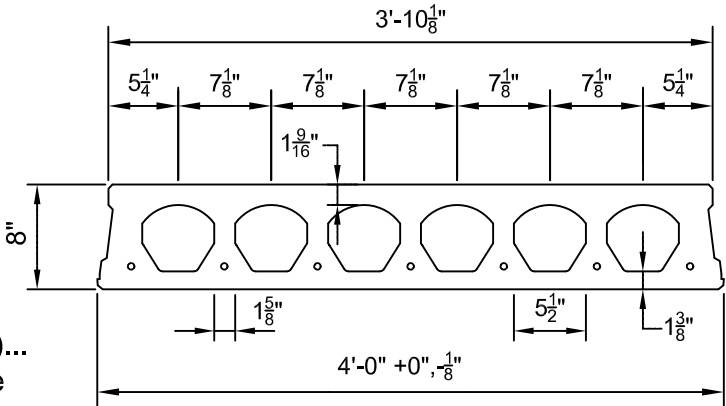

## DESIGN DATA

- Precast Strength @ 28 days = 6000 PSI
- Precast Strength @ release = 3800 PSI
- Precast Density = 150 PCF
- Strand = 1/2"Ø 270K Lo-Relaxation.
- Strand Height = 1.75 in.
- Ultimate moment capacity (when fully developed)...
  - 7-3/8"Ø, 270K = 70.6 k-ft at 60% jacking force
  - 6-1/2"Ø, 270K = 104.7 k-ft at 60% jacking force
  - 7-1/2"Ø, 270K = 119.8 k-ft at 60% jacking force
- Maximum bottom tensile stress is  $10\sqrt{f_c} = 775$  PSI
- All superimposed load is treated as live load in the strength analysis of flexure and shear.
- Flexural strength capacity is based on stress/strain strand relationships.
- Deflection limits were not considered when determining allowable loads in this table.
- Load values to the left of the solid line are controlled by ultimate shear strength.
- Load values to the right are controlled by ultimate flexural strength or allowable service stresses.
- Camber is inherent in all prestressed hollow core slabs and is a function of the amount of eccentric prestressing force needed to carry the superimposed design loads along with a number of other variables. Because prediction of camber is based on empirical formulas it is at best an estimate, with the actual camber usually higher than calculated values.

SAFE SUPERIMPOSED SERVICE LOADS		IBC 2012 & ACI 318-11 (1.2 D + 1.6 L)																		
Strand Pattern	LOAD (PSF)	SPAN (FEET)																		
		17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
6 - 1/2"Ø	LOAD (PSF)	287	267	250	235	217	197	180	168	159	147	133	120	109	99	90	81	74	67	60
7 - 1/2"Ø	LOAD (PSF)	288	269	252	236	222	210	196	179	165	152	144	137	126	117	108	100	91	83	75



2655 Molly Pitcher Hwy. South, Box 2013  
Chambersburg, PA 17202-9203  
717-267-4505 Fax 717-267-4518

This table is for simple spans and uniform loads. Design data for any of these span-load conditions is available on request. Individual designs may be furnished to satisfy unusual conditions of heavy loads, concentrated loads, cantilevers, flange or stem openings and narrow widths. The allowable loads shown in this table reflect a 1 Hour & 0 Minute fire resistance rating.